

Junho Lee<sup>1</sup>, Charles P. Aubeny<sup>1</sup>

<sup>1</sup>Zachry Department of Civil & Environmental Engineering, Texas A&M University

## Background

- The trend in the offshore wind industry:
  - Stronger, more consistent wind resources
  - Mitigation of aesthetic issues
- Nevertheless, the high capital cost of the support system remains a primary obstacle → A need for cost-effective FOWT system

- ✓ FOWTs\*
- ✓ Installation in deeper & farther water

\* floating offshore wind turbines

## Introduction

- Considerations for the development of anchors for mooring FOWTs:

### Cost

- Fewer & lighter anchors
- Maximizing geotechnical efficiency

- ✓ Material cost ↓
- ✓ Transport cost ↓
- ✓ Installation cost ↓

### Soil condition

- Deployable in the wide range of soil conditions → many potential sites

### Reliability

- Precise positioning
- Deep embedment depth

- ✓ Robust performance under unintended loading conditions

- Thus, multiline ring anchor (MRA) developed to address the above considerations [1, 2]

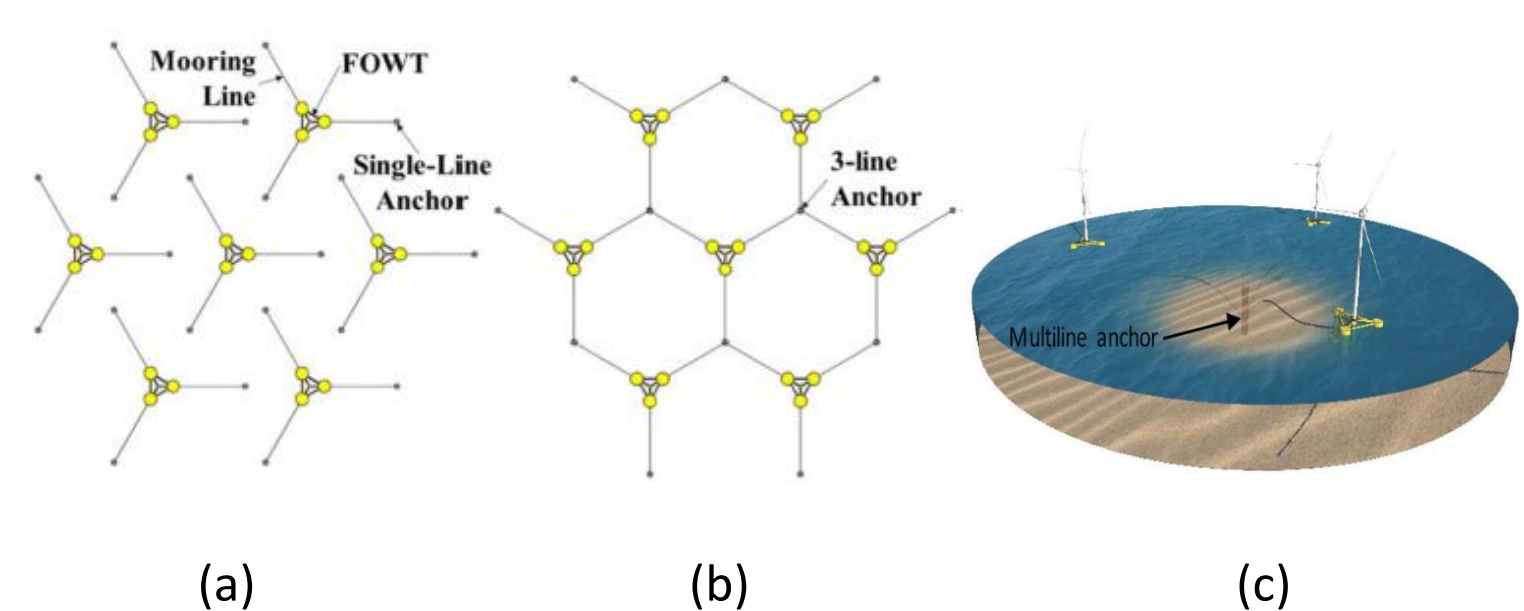


Figure 1. Comparison between single line anchor and multiline anchor [2]: (a) layout of single line, (b) layout of 3-line anchor, (c) multiline anchor concept

## The Multiline Ring Anchor (MRA)

### A. The concept of the MRA

- An embedded ring with up to 6 mooring lines
- Optional wing plates or keying flaps (Fig. 2) → enhancing horizontal & vertical load capacity
- The pile is penetrated to a certain embedment depth using driving or suction installation. Then the pile is extracted, leaving the ring anchor adequate depth (Fig. 3)

### B. Potential advantages of the MRA

- Install in the wide range of soil → wide potential resources sites
- Multiline potential → reduced costs for geotechnical investigation, transport, material, fabrication, and installation
- Geotechnical efficiency: less than most plates, but still well above piles and caissons
- Precise positioning & deep embedment → high reliability

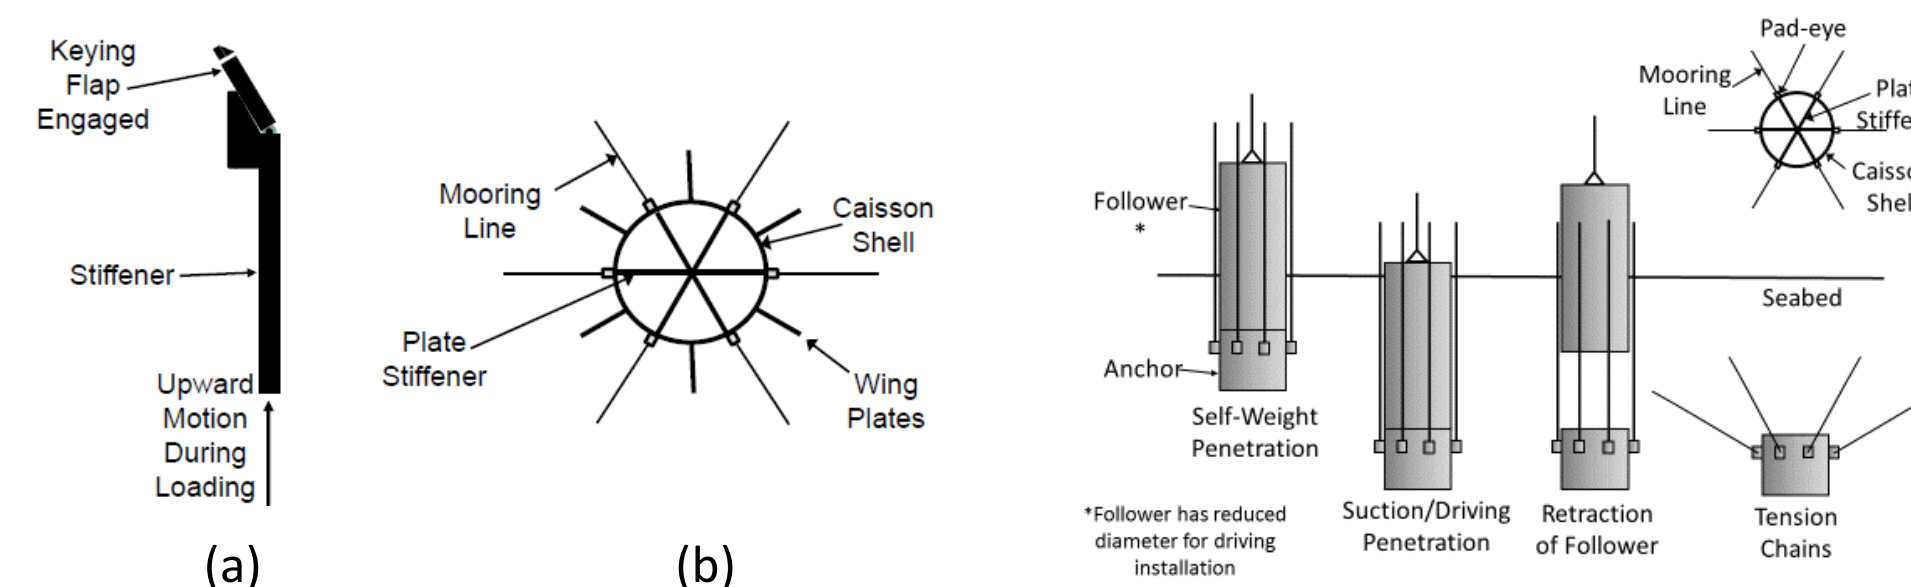


Figure 2. Strategies for enhancing load capacity: (a) keying flaps, (b) wing plates

Figure 3. The installation procedure of the MRA

## Example Comparative Study

- Comparison to conventional suction caisson (SC) anchors can be instructive (Fig.4).
- A typical soft clay (e.g Gulf of Mexico, [3]):  $s_u(z)=5+2kPa/m \cdot z$

### A. Load capacity comparisons

- Consider SC and the MRA designed to provide load capacity equal to that of SC (Appendix)
- Horizontal load capacity,  $H$  (Fig. 5)
  - $H_{max}$ : Parity can be achievable without increasing  $D$ .
  - The MRA has less moment resistance than SC due to shorter length (Moment,  $M = H | L_i - L_{iopt} |$ ).
- Vertical load capacity,  $V$  (Table 1)
  - $V_{max}$ : The MRA diameter needed to be increased to 4m to achieve parity in  $V_{max}$  with the SC.

### B. Comparative efficiency

- Geotechnical efficiency ( $\eta_H = H_{max}/W$ )
  - Horizontal loading: MRA  $\eta_H = 29$ , SC  $\eta_H = 17.9$
  - Vertical loading: MRA  $\eta_V = 9.8$ , SC  $\eta_V = 9.2$  → motivate to further research about keying flap
- Weight efficiency: ex) AHV transport operation
  - 1 SC = 3 or 4 MRA → fewer trips or smaller AHVs

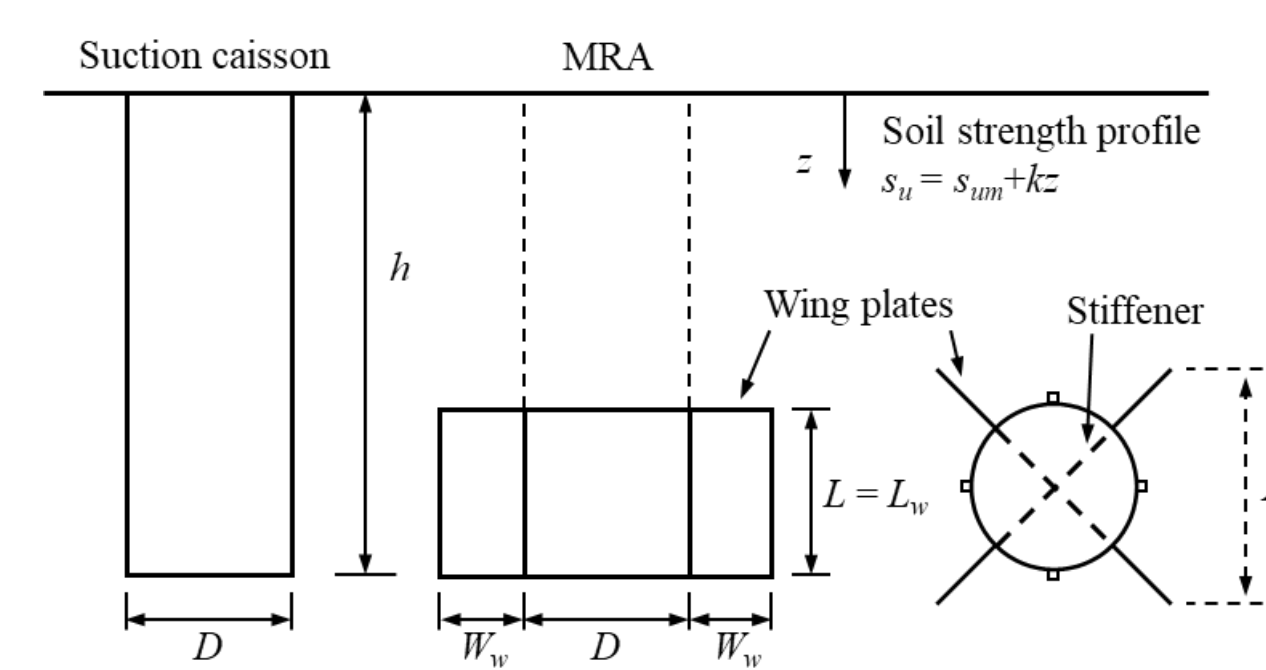


Figure 4. Suction caisson and MRA in clay

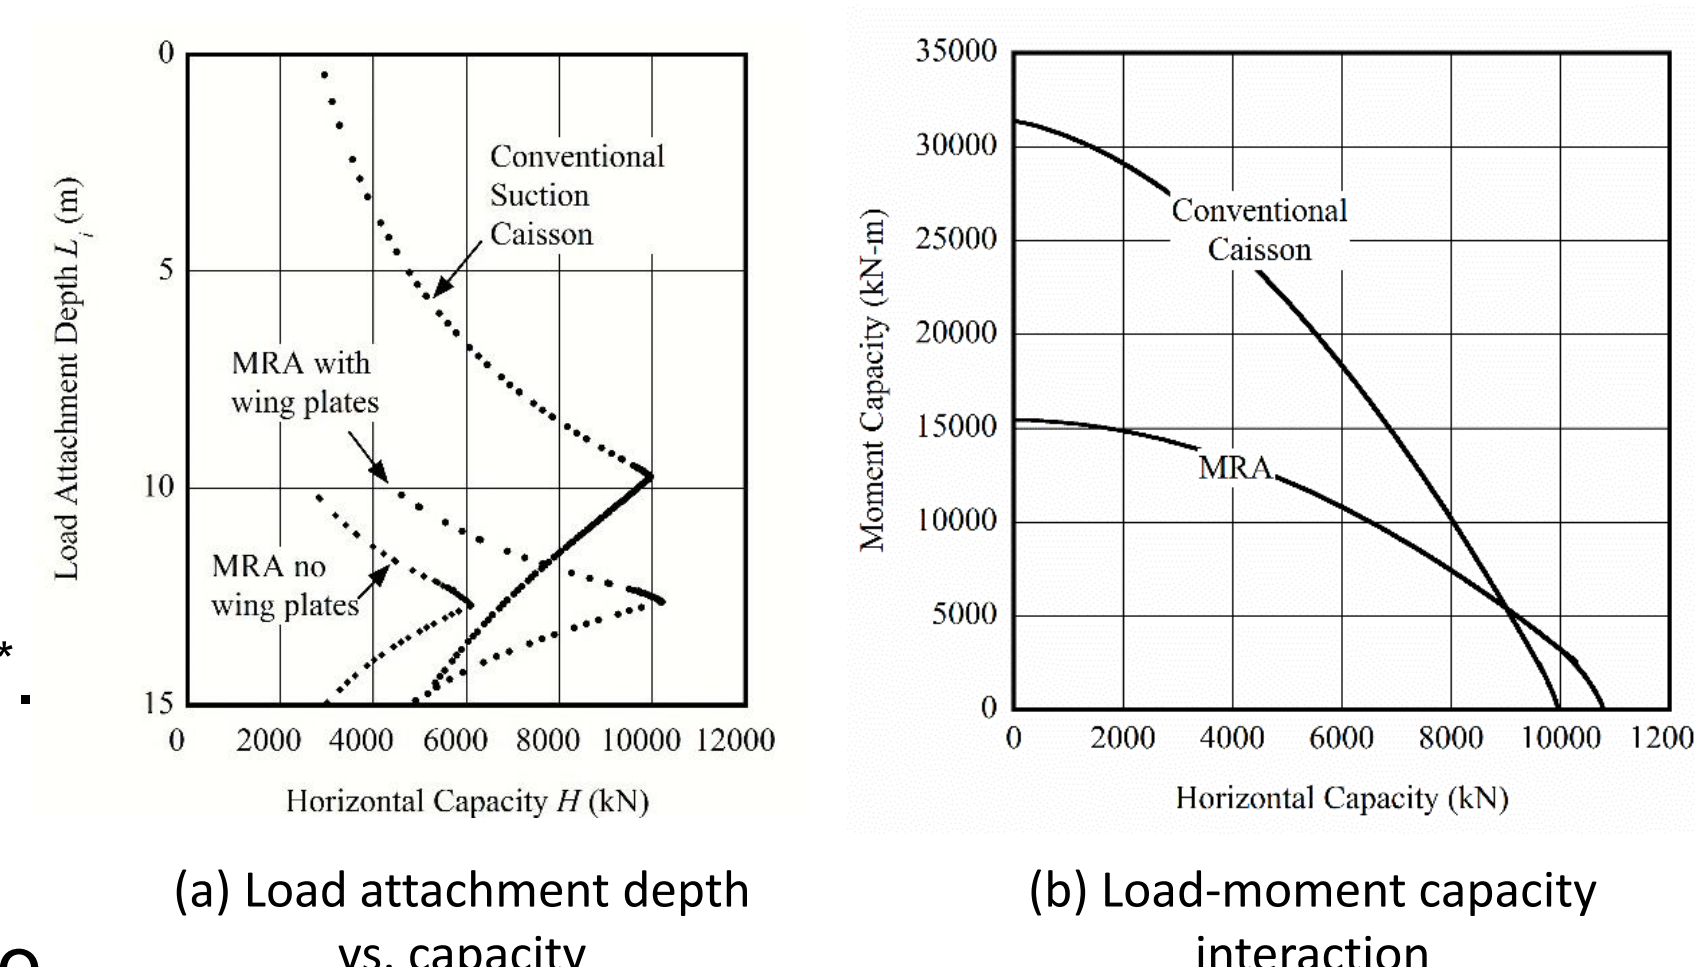


Figure 5. Horizontal load capacity of MRA in clay

(<sup>1</sup> floating offshore wind turbines)

Table 1. Comparative evaluation of suction caisson and MRA load capacity

Anchor	Features	Capacity enhancement	Weight (kN)	$H_{max}$ (kN)	$V_{max}$ (kN)
Suction caisson	$D = 3$ m $L = 15$ m $t = 0.04$ m	--	557	9,960	5,130
MRA matching horizontal capacity	$D = 3.3$ m $L = 5.5$ m $z_{tip} = 15$ m $t = 0.04$ m	6 wing plates: $W_w = 1.65$ m $L_w = 5.5$ m $t_w = 0.04$ m	350	10,800	--
MRA matching vertical capacity	$D = 4$ m $L = 6.67$ m $z_{tip} = 15$ m $t = 0.04$ m	6 wing plates 3 stiffeners: $L_s = 6.67$ m $t_s = 0.04$ m	538	--	5,250

\*\*  $L_i$ : load attachment depth,  $L_{iopt}$ : Optimum  $L_i$

## Concluding Comments

- The MRA provide a means for significantly reducing the number of foundation footprints, with associated cost reductions.
- Installation cost for the MRA are medium (suction) to high (driving). However, the multiline potential may tend to offset its greater installation costs.
- Deep embedment & precise positioning can ensure robust performance under unintended loading and reliable prediction.
- Compared to SC, the MRA has a clear advantage under horizontal loading, future research is needed to improve the vertical load capacity by introducing keying flaps.

## Appendix

- The MRA load capacity parity can be achieved by increasing  $D$  or  $W_w$  of wings.
- The design procedure is to (1) evaluate the MRA capacity using the same  $D$  as the suction caisson, (2) add wing plates to a maximum dimension  $W_w = D/2$ , and (3) if the previous step does not produce the target load capacity, incrementally increase  $D$ .
- Estimated using a plastic limit analysis [4]

## References

- [1] Diaz B D, Rasulo M, Aubeny C P, Fontana C M, Arwade S R, DeGroot D J and Landon M 2016 Multiline anchors for floating offshore wind towers. In: *OCEANS 2016 MTS/IEEE Monterey*, pp 1-9.
- [2] Fontana C M, Hallowell S T, Arwade S R, DeGroot D J, Landon M E, Aubeny C P, Diaz B, Myers A T and Ozmutlu S 2018 Multiline anchor force dynamics in floating offshore wind turbines *Wind Energy* **21** 1177-90
- [3] Quiros G, Young A, Pelletier J and Chan J 1983 Shear strength interpretation for Gulf of Mexico clays. In: *Geotechnical practice in offshore engineering*. (Austin, Texas: ASCE) pp 144-65
- [4] Aubeny C 2017 *Geomechanics of Marine Anchors* (Boca Raton: CRC Press, Taylor & Francis Group)

